

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)


PCT

(10) International Publication Number
WO 03/083318 A1

- (51) International Patent Classification⁷: **F16C 33/10** (74) Agents: **ROBINSON, Nigel, Alexander, Julian et al.**; D Young & Co., 21 New Fetter Lane, London EC4A 1DA (GB).
- (21) International Application Number: **PCT/GB03/01255**
- (22) International Filing Date: **24 March 2003 (24.03.2003)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
0207426.8 28 March 2002 (28.03.2002) GB
- (71) Applicant (*for all designated States except US*): **IMPERIAL COLLEGE INNOVATIONS LIMITED** [GB/GB]; Sherfield Building, Imperial College, London SW7 2AZ (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **SPIKES, Hugh, Alexander** [GB/GB]; Flat 3, 11 Lexham Gardens, London W8 5JJ (GB).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: BEARING

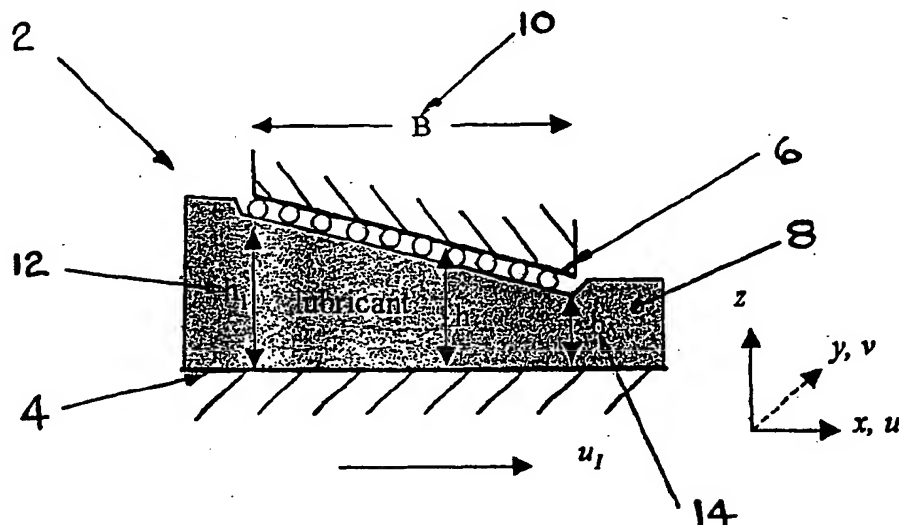

(57) **Abstract:** A bearing includes a contact region (2) filled with lubricant (8) between two otherwise rubbing surfaces (4, 6). One surface moves relative to a stationary other. The moving surface entrains the lubricant into the contact region to generate pressure within the lubricant enabling support of a load whilst the lubricant slips against the stationary surface.

WO 03/083318 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.